



SHAFTS SCREENERS MB-HDS307



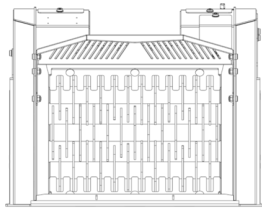

A

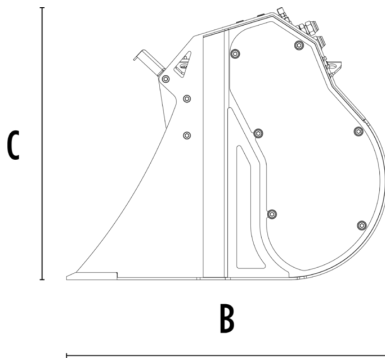

B

C

SPECIFICATIONS




	Recommended excavator	ton	2,5 - 5
	Recommended backhoe loader/loader*	ton	4 - 6**
	Weight	ton	0,17
	Load capacity	m ³	0,08
	Pressure	bar	200 - 220
	Oil flow rate***	l/min	25 - 35
	Size A	mm	760
	Size B	mm	700
	Size C	mm	595

* Please verify machine's Rated Operating Capacity

** Applicable only on the rear arm of the backhoe.

*** The minimum hydraulic flow rate value must be alongside the required operating pressure

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Sifting damp/dry soil
 RQ15 Sifting kit	15 mm	Soil Aeration
 RM Mixer kit		Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction

* Shafts in closed position.

OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ15 Sifting kit
RM Mixer kit	Shaft holder
24 Month warranty	

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Recycling aggregates



Excavations



Urban construction site



Foundries



Maintaining landscape and agricultural areas