



SORTING GRAPPLE

MB-G350 S4

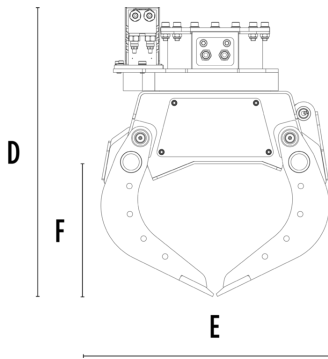

SPECIFICATIONS

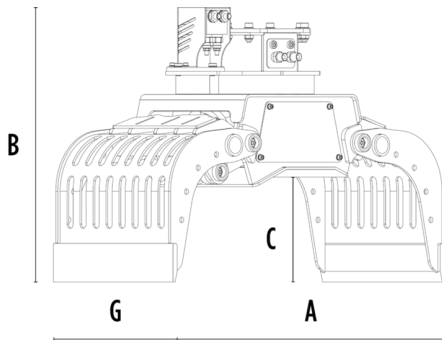









Recommended excavator	lb	2,860 - 5,730
Weight	lb	187
Capacity (claws closed)	cy	0.04
Rotation	Degree	360°
Oil pressure (rotation)	PSI	1,885 - 2,466
Oil flow rate (rotation)	gal/min	1 - 3
Maximum oil pressure (opening - closing)	PSI	2,611 - 3,191
Maximum oil flow rate (opening - closing)	gal/min	4 - 5
Size A	in	31
Size B	in	22
Size C	in	9
Size D	in	35
Size E	in	19
Size F	in	11
Size G	in	14

OPTIONAL ACCESSORIES

Clam shell kit	Serrated side plate kit
Electrical kit (for 2 hose functionality) 12 V	24 Month warranty

APPLICATION AREAS

 Demolitions	 Road works	 Tunnels	 Enclosed spaces	 Pipelines
 Urban construction site	 Maintaining landscape and agricultural areas	 Forest Maintenance		

