




SHAFTS SCREENER MB-HDS523

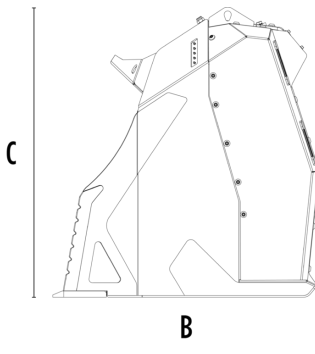

SPECIFICATIONS

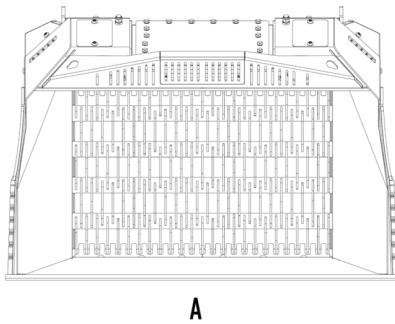








Recommended excavator	lb	66,140 - 99,210
Weight	lb	7,386
Load capacity	cy	2.62 - 3.14*
Load capacity with coal capacity increase kit	cy	3.14 - 4.58*
Pressure	PSI	3,626 - 4,351
Oil flow rate**	gal/min	61 - 66
Size A	in	92
Size B	in	59
Size C	in	64

* The value of the load capacity varies according to the type of material being processed.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit  RQ20 Sifting kit  RQ50 Sifting kit	0.30 in	Sifting damp/dry soil Soil Aeration
	0.8 in	
	2.0 in	
 RM Mixer kit		Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction
 RE8 Fine sifting kit  RE16 Fine sifting kit	0.30 in	Sifting damp/dry soil
	0.60 in	
 RC Compost kit	1.40 in	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder
24 Month Warranty	

APPLICATION AREAS



Quarry



Mines



Pipelines



Inert material
recycling



Excavations



Foundries



Maintaining landscape
and agricultural areas