



# CRUSHER BUCKET BF135.8



A

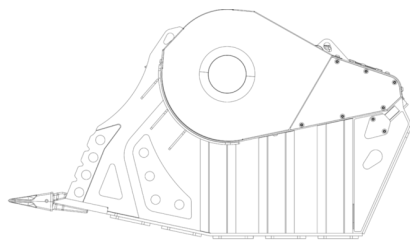

B



## SPECIFICATIONS



|                       |         |                  |
|-----------------------|---------|------------------|
| Recommended excavator | lb      | 94,800 - 176,370 |
| Weight                | lb      | 16,535           |
| Load capacity         | cy      | 2.35             |
| Pressure              | PSI     | 3,336 - 4,061    |
| Back pressure         | PSI     | < 145            |
| Oil flow rate*        | gal/min | 85 - 100         |
| Mouth width           | in      | 51               |
| Mouth height          | in      | 24               |
| Size A                | in      | 74               |
| Size B                | in      | 118              |
| Size C                | in      | 67               |

\* The minimum hydraulic flow rate value must be alongside the required operating pressure

## OPTIONAL ACCESSORIES

Dust suppression kit

Hour meter

Iron separator 24 V

## APPLICATION AREAS



Demolitions



Road works



Quarry



Mines



Pipelines



Inert material recycling



Foundries



Forest Maintenance