

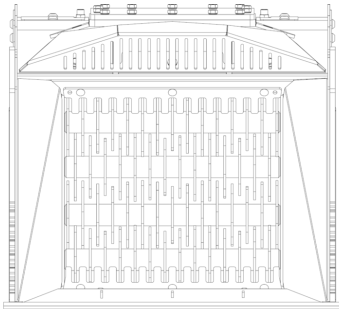


# SHAFTS SCREENERS MB-HDS412



A

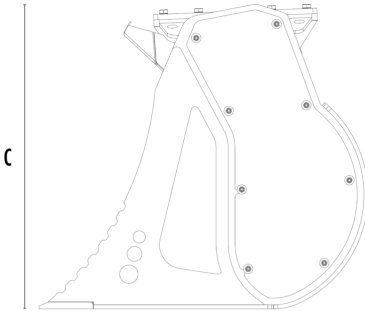

B








## SPECIFICATIONS



Recommended excavator	ton	10 - 14
Weight	ton	1,2
Load capacity	m <sup>3</sup>	0,55
Pressure	bar	230 - 280
Oil flow rate*	l/min	90 - 150
Size A	mm	1250
Size B	mm	1220
Size C	mm	1110

\* The minimum hydraulic flow rate value must be alongside the required operating pressure

## SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 <b>RQ8 Sifting kit</b>  <b>RQ20 Sifting kit</b>  <b>RQ50 Sifting kit</b>	8 mm 20 mm 50 mm	Sifting damp/dry soil Soil Aeration
 <b>RM Mixer kit</b>		Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction
 <b>RE8 Fine sifting kit</b>  <b>RE16 Fine sifting kit</b>	8.5 mm 16 mm	Sifting damp/dry soil
 <b>RC Compost kit</b>	36.5 mm	Shredding foliage and small branches Composting

\* Shafts in closed position.

## OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder
24 Month warranty	

## APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Recycling aggregates



Excavations



Urban construction site



Foundries



Maintaining landscape and agricultural areas

