



SHAFTS SCREENER MB-HDS312

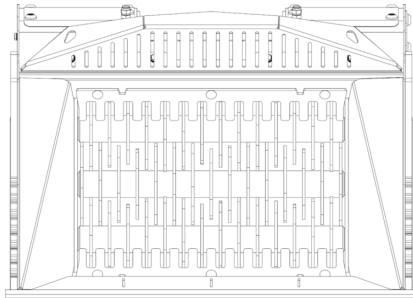

A

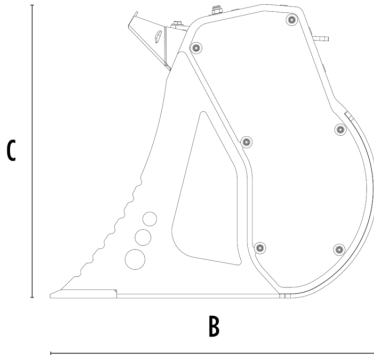

B





SPECIFICATIONS



| | | |
|-----------------------|----------------|-----------|
| Recommended excavator | ton | 7 - 11 |
| Weight | ton | 0,72 |
| Load capacity | m ³ | 0,35 |
| Pressure | bar | 200 - 250 |
| Oil flow rate* | l/min | 75 - 100 |
| Size A | mm | 1235 |
| Size B | mm | 985 |
| Size C | mm | 880 |

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

| KIT | ADJUSTMENT* | APPLICATION |
|--|------------------------|---|
|  RQ8 Sifting kit RQ20 Sifting kit RQ50 Sifting kit | 8 mm 20 mm 50 mm | Sifting damp/dry soil Soil Aeration |
|  RM Mixer kit | | Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction |
|  RE8 Fine sifting kit RE16 Fine sifting kit | 8.5 mm 16 mm | Sifting damp/dry soil |
|  RC Compost kit | 36.5 mm | Shredding foliage and small branches Composting |

* Shafts in closed position.

OPTIONAL ACCESSORIES

| | |
|----------------------|-----------------------|
| RQ8 Sifting kit | RQ20 Sifting kit |
| RQ50 Sifting kit | RM Mixer kit |
| RE8 Fine sifting kit | RE16 Fine sifting kit |
| RC Compost kit | Shaft holder |
| 24 Month Warranty | |

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material recycling



Excavations



Urban construction sites



Foundries



Maintaining landscape and agricultural areas