



SORTING GRAPPLE

MB-G500 S4



SPECIFICATIONS

Recommended excavator	lb	11,020 - 17,640
Weight	lb	926
Capacity (claws closed)	cy	0.24
Rotation	Degree	360°
Oil pressure (rotation)	PSI	2,321 - 2,901
Oil flow rate (rotation)	gal/min	4 - 7
Maximum oil pressure (opening - closing)	PSI	2,611 - 3,626
Maximum oil flow rate (opening - closing)	gal/min	8 - 11
Size A	in	59
Size B	in	39
Size C	in	16
Size D	in	43
Size E	in	34
Size F	in	21
Size G	in	22

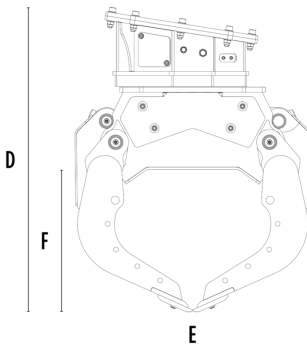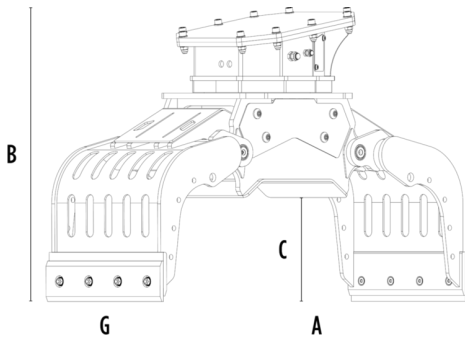

OPTIONAL ACCESSORIES

Multi-purpose blade kit	Clam shell kit
Serrated side plate kit	Grip improvement kit
Rubber protection kit	Electrical kit (for 2 hose functionality) 12 V
24 Month warranty	

APPLICATION AREAS



Demolitions



Road works



Tunnels



Enclosed spaces



Pipelines



Urban construction site



Maintaining landscape and agricultural areas



Forest Maintenance

