



# SHAFTS SCREENERS MB-HDS523



## SPECIFICATIONS

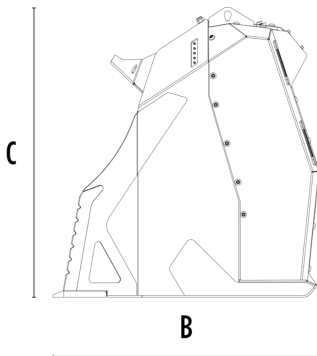


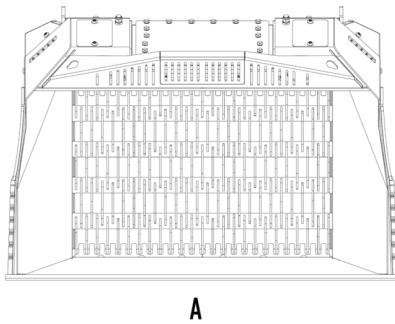


Recommended excavator	lb	66,140 - 99,210
Weight	lb	7,386
Load capacity	cy	2.62 - 3.14*
Load capacity with coal capacity increase kit	cy	3.14 - 4.58*
Pressure	PSI	3,626 - 4,351
Oil flow rate**	gal/min	61 - 66
Size A	in	92
Size B	in	59
Size C	in	64

\* The value of the load capacity varies according to the type of material being processed.

\*\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

## SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION	
 RQ8 Sifting kit RQ20 Sifting kit RQ50 Sifting kit	0.30 in	Sifting damp/dry soil Soil Aeration	
	0.8 in		
	2.0 in		
 RM Mixer kit		Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction	
	 RE8 Fine sifting kit RE16 Fine sifting kit	0.30 in	Sifting damp/dry soil
		0.60 in	
	 RC Compost kit	1.40 in	Shredding foliage and small branches Composting

\* Shafts in closed position.

## OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder

## APPLICATION AREAS



Quarry



Mines



Pipelines



Recycling aggregates



Excavations



Foundries



Maintaining landscape  
and agricultural areas