



SCREENING BUCKET MB-S23



A

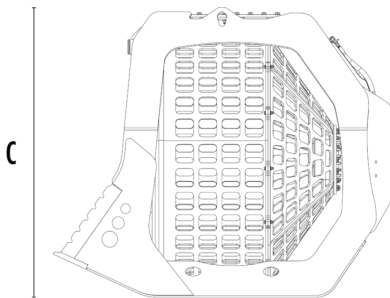

B



SPECIFICATIONS












Recommended excavator	ton	35 - 50
Weight	ton	3,66
Load capacity	m ³	3,75
Pressure	bar	320 - 350
Back pressure	bar	< 5
Oil flow rate*	l/min	160 - 180
Basket diameter	mm	1970
Basket depth	mm	1490
Size A	mm	2320
Size B	mm	2840
Size C	mm	2350

* The minimum hydraulic flow rate value must be alongside the required operating pressure

OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
24 Month warranty	

APPLICATION AREAS

 Demolitions	 Road works	 Quarry	 Mines	 Pipelines
 Recycling aggregates	 Excavations	 Foundries	 Underwater works	