





# SHAFTS SCREENERS MB-HDS320



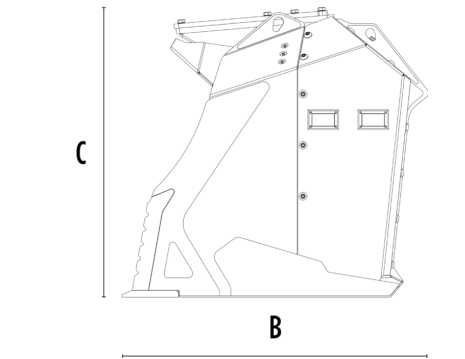


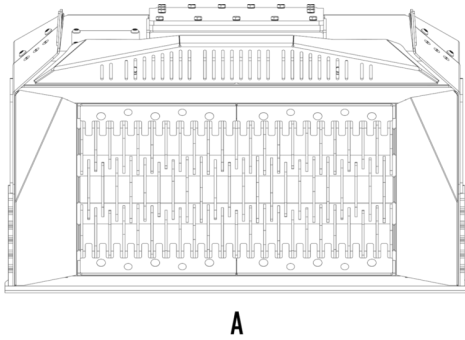



## SPECIFICATIONS

	Recommended excavator	ton	18 - 24
	Recommended backhoe loader/loader*	ton	11 - 14
	Weight	ton	2,1
	Load capacity	m <sup>3</sup>	1.35
	Pressure	bar	250 - 300
	Oil flow rate**	l/min	120 - 160
	Size A	mm	2050
	Size B	mm	1350
	Size C	mm	1250

\* Please verify machine's Rated Operating Capacity

\*\* The minimum hydraulic flow rate value must be alongside the required operating pressure

## SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Sifting damp/dry soil
 RQ20 Sifting kit	20 mm	Soil Aeration
 RQ50 Sifting kit	50 mm	Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction
 RM Mixer kit		Sifting damp/dry soil
 RE8 Fine sifting kit	8.5 mm	Shredding foliage and small branches Composting
 RE16 Fine sifting kit	16 mm	
 RC Compost kit	36.5 mm	

\* Shafts in closed position.

## OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder

## APPLICATION AREAS

