



# SHAFTS SCREENERS MB-HDS307



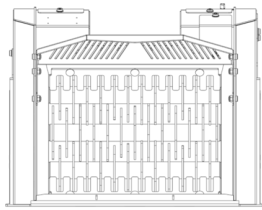

A

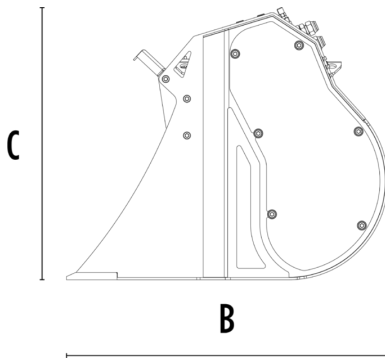

B

C

## SPECIFICATIONS




|   |                                    |                |           |
|---|------------------------------------|----------------|-----------|
|  | Recommended excavator              | ton            | 2,5 - 5   |
|  | Recommended backhoe loader/loader* | ton            | 4 - 6**   |
|   | Weight                             | ton            | 0,17      |
|   | Load capacity                      | m <sup>3</sup> | 0.08      |
|   | Pressure                           | bar            | 200 - 220 |
|   | Oil flow rate***                   | l/min          | 25 - 35   |
|   | Size A                             | mm             | 760       |
|   | Size B                             | mm             | 700       |
|   | Size C                             | mm             | 595       |

\* Please verify machine's Rated Operating Capacity

\*\* Applicable only on the rear arm of the backhoe.

\*\*\* The minimum hydraulic flow rate value must be alongside the required operating pressure

## SHAFT KIT

| KIT  | ADJUSTMENT* | APPLICATION   |
|--|-------------|---|
|  RQ8 Sifting kit  | 8 mm        | Sifting damp/dry soil   |
|  RQ15 Sifting kit | 15 mm       | Soil Aeration   |
|  RM Mixer kit   |             | Soil Aeration<br>Compost Aeration<br>Charcoal reduction<br>Glass reduction<br>Drywall reduction |

\* Shafts in closed position.

## OPTIONAL ACCESSORIES

|                 |                  |
|-----------------|------------------|
| RQ8 Sifting kit | RQ15 Sifting kit |
| RM Mixer kit    | Shaft holder     |

## APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Recycling aggregates



Excavations



Urban construction site



Foundries



Maintaining landscape and agricultural areas