




CRUSHER BUCKET MB-L160 S2

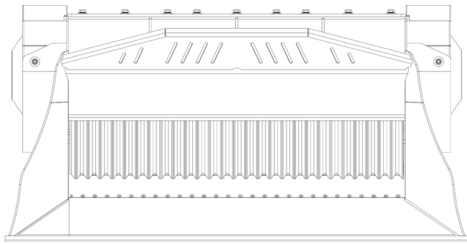

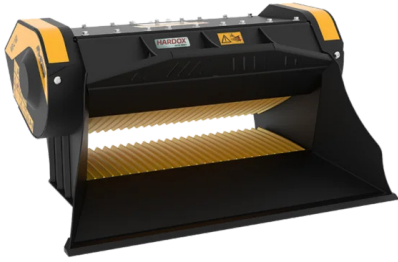


A

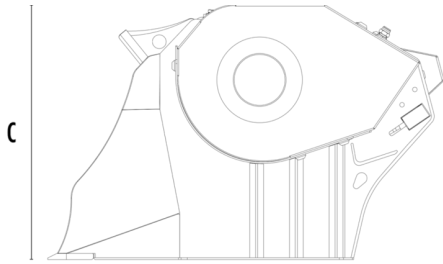

B



SPECIFICATIONS

	Recommended excavator	lb	24,250 - 35,270
	Recommended backhoe loader/loader*	lb	15,430 - 24,250
	Recommended skid steer loader*	lb	11,020 - 15,430
	Weight	lb	3,197
	Load capacity	cy	0.46
	Pressure	PSI	2,901 - 4,061
	Back pressure	PSI	< 145
	Oil flow rate**	gal/min	29 - 53
	Mouth width	in	46
	Mouth height	in	11
	Size A	in	64
	Size B	in	51
	Size C	in	33

* Please verify machine's Rated Operating Capacity

** The minimum hydraulic flow rate value must be alongside the required operating pressure

OPTIONAL ACCESSORIES

Dust suppression kit

Hour meter

24 Month warranty

APPLICATION AREAS



Demolitions



Road works



Recycling aggregates



Urban construction site