



SCREENING BUCKET MB-S23



A

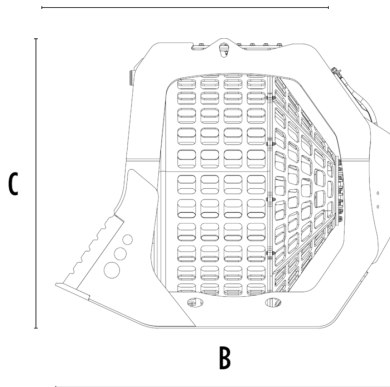

B



SPECIFICATIONS



Recommended excavator	ton	35 - 50
Weight	ton	3,66
Load capacity	m ³	3,75
Pressure	bar	320 - 350
Back pressure	bar	< 5
Oil flow rate*	l/min	160 - 180
Basket diameter	mm	1970
Basket depth	mm	1490
Size A	mm	2320
Size B	mm	2840
Size C	mm	2350

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

OPTIONAL ACCESSORIES

Dust suppression kit

Hour meter

APPLICATION AREAS



Demolitions



Road works



Quarry



Mines



Pipelines



Inert material recycling



Excavations



Foundries



Underwater works