



SHAFTS SCREENERS MB-HDS523

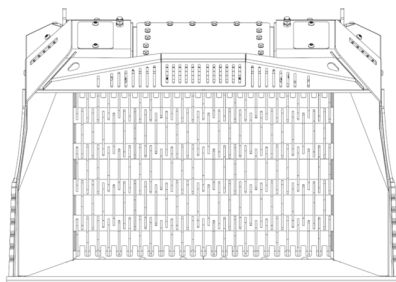

A



B










SPECIFICATIONS



Recommended excavator	ton	30 - 45
Weight	ton	3,35
Load capacity	m ³	2,00
Pressure	bar	250 - 300
Oil flow rate*	l/min	230 - 250
Size A	mm	2330
Size B	mm	1500
Size C	mm	1620

* The minimum hydraulic flow rate value must be alongside the required operating pressure

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit  RQ20 Sifting kit  RQ50 Sifting kit	8 mm	Sifting damp/dry soil
	20 mm	Soil Aeration
	50 mm	Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction
 RM Mixer kit		
 RE8 Fine sifting kit  RE16 Fine sifting kit	8.5 mm	Sifting damp/dry soil
	16 mm	
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder
24 Month warranty	

APPLICATION AREAS



Quarry



Mines



Pipelines



Recycling aggregates



Excavations



Foundries



Maintaining landscape
and agricultural areas