

PERLAPOWER

LAMP WITH PVC FLANGE, NICHE,
DIFFUSER and 4m of CABLE

Cod.2115344094


PERLA RGBW POWER 120° WITH PVC FLANGE AND NICHE



LED pool lamp with RGBW variable colour, ideal for large pools. PLC controlled. The niche included contains space to collect the cable for maintenance. For panel and reinforced concrete with tiles or pool liner.

Technical data

Power supply	12 V AC
Current	5.25 A
Maximum power consumption	62 W
Apparent maximum power	75 VA
Insulation class	III
Connection	4 m BLUE PBS-POOL CABLE 2X2.5
Maximum cable length	14 m
Coverage area m2	25 - 30
Beam angle	120°
Number of LEDs	24
LED color	RGBW
Total luminous flux	3173 lm
White luminous flux	1198 lm
Red luminous flux	517 lm
Green luminous flux	1115 lm
Blue luminous flux	343 lm
Body	AISI316L STEEL, GLASS
Weight	2.6 kg
Protection rating	IP68
Working conditions	EXCLUSIVELY IN THE WATER
Maximum ambient temperature	MAX +40 °C
Control signal	POWER LINE COMUNICATION

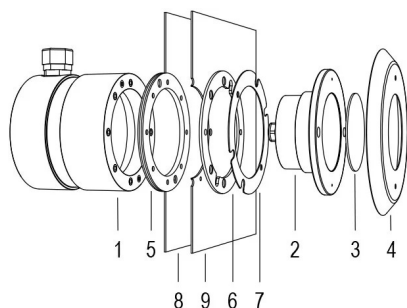

1. NICHE
2. LAMP
3. OPTICAL DIFFUSER
4. FRONT FLANGE
5. SANDWICH GASKET
6. LINER FLANGE
7. PLEXY SPACER
8. PANEL
9. POOL LINER


Related documentation:

Manuale utente IT:
[man_2115344094_it.pdf](#)

Certificato CE IT:
[ce_2115344094_it.pdf](#)

User manual EN:
[man_2115344094_en.pdf](#)

CE certification EN:
[ce_2115344094_en.pdf](#)

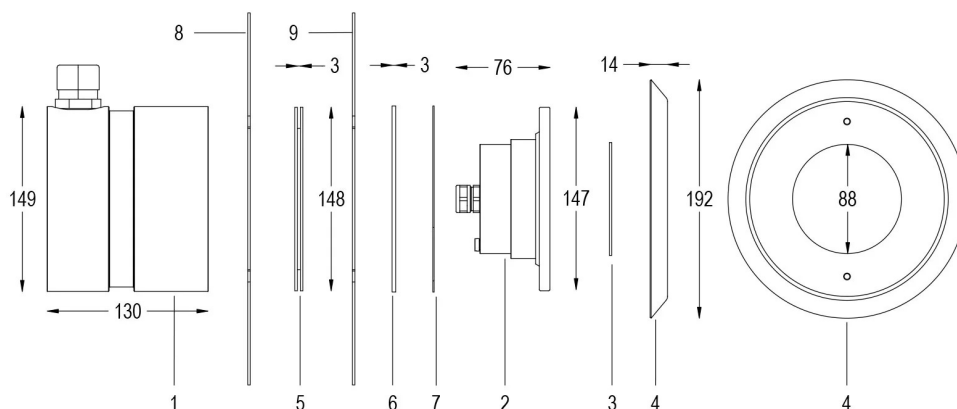

14/10/2024 - The data in this document may be changed without notice in order to improve the product or to correct any errors.

TECLUMEN

TECLUMEN SRL

Via Castel Goffredo 35/1 - 46040 Casaloldo MN
T +39 0376 77 86 70 - F -39 0376 77 86 60

info@teclumen.it - www.teclumen.it
PIVA - C.F. - Reg. Imp. MN: 00462430208
CCIAA MN R.A.E. IT 0802100016 - Cap. Soc. 80.000,00 i.v.