



SCREENING BUCKET MB-S10 S4



A

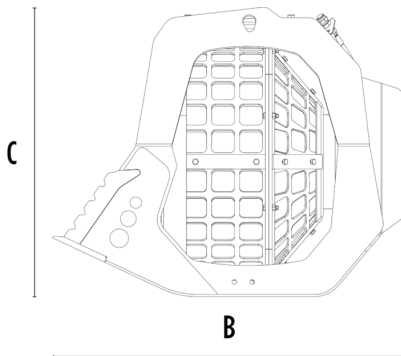

B



SPECIFICATIONS



Recommended excavator	ton	6 - 9
Recommended backhoe loader	ton	8 - 9*
Weight	ton	0,41
Load capacity	m ³	0,32
Pressure	bar	130 - 150
Back pressure	bar	< 20
Oil flow rate**	l/min	40 - 60
Basket diameter	mm	800
Basket depth	mm	555
Size A	mm	950
Size B	mm	1220
Size C	mm	1010

* Applicable only on the rear arm of the backhoe.

** The minimum hydraulic flow rate value must be alongside the required operating pressure

OPTIONAL ACCESSORIES

Hour meter

Basket protection kit

24 Month warranty

APPLICATION AREAS



Demolitions



Road works



Tunnels



Enclosed spaces



Pipelines



Recycling aggregates



Excavations



Urban construction site



Maintaining landscape and agricultural areas



Forest Maintenance