



SCREENING BUCKET MB-S23



A

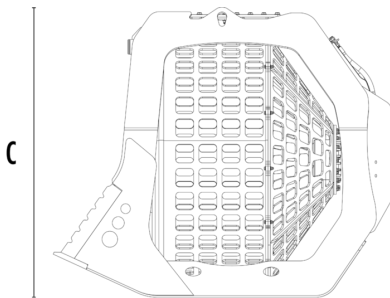

B



SPECIFICATIONS












Recommended excavator	lb	77,160 - 110,230
Weight	lb	8,069
Load capacity	cy	4.90
Pressure	PSI	4,641 - 5,076
Back pressure	PSI	< 73
Oil flow rate*	gal/min	42 - 48
Basket diameter	in	78
Basket depth	in	59
Size A	in	91
Size B	in	112
Size C	in	93

* The minimum hydraulic flow rate value must be alongside the required operating pressure

OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
24 Month warranty	

APPLICATION AREAS

 Demolitions	 Road works	 Quarry	 Mines	 Pipelines
 Recycling aggregates	 Excavations	 Foundries	 Underwater works	

