



# SCREENING BUCKET MB-S23



A

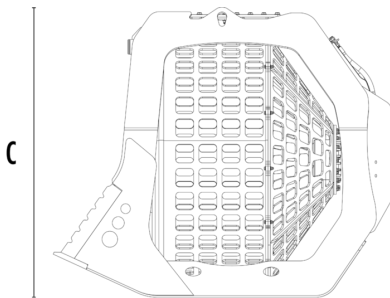

B



## SPECIFICATIONS












Recommended excavator	lb	77,160 - 110,230
Weight	lb	8,069
Load capacity	cy	4.90
Pressure	PSI	4,641 - 5,076
Back pressure	PSI	< 73
Oil flow rate*	gal/min	42 - 48
Basket diameter	in	78
Basket depth	in	59
Size A	in	91
Size B	in	112
Size C	in	93

\* The minimum hydraulic flow rate value must be alongside the required operating pressure

## OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
24 Month warranty	

## APPLICATION AREAS

 Demolitions	 Road works	 Quarry	 Mines	 Pipelines
 Recycling aggregates	 Excavations	 Foundries	 Underwater works	

