



# SHAFTS SCREENER MB-HDS523

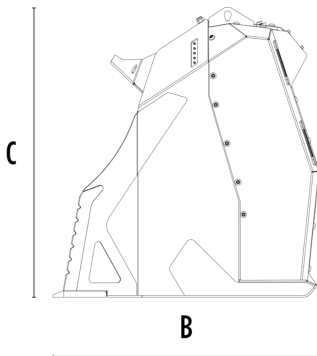

## SPECIFICATIONS

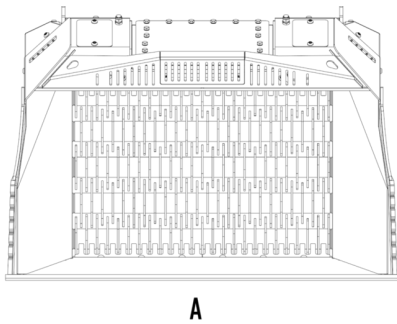

Recommended excavator	ton	30 - 45
Weight	ton	3,35
Load capacity	m <sup>3</sup>	2,00 - 2,40*
Load capacity with coal capacity increase kit	m <sup>3</sup>	2,40 - 3,50*
Pressure	bar	250 - 300
Oil flow rate**	l/min	230 - 250
Size A	mm	2330
Size B	mm	1500
Size C	mm	1620

\* The value of the load capacity varies according to the type of material being processed.

\*\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

## SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
RQ8 Sifting kit	8 mm	Sifting damp/dry soil Soil Aeration
RQ20 Sifting kit	20 mm	
RQ50 Sifting kit	50 mm	
RM Mixer kit		Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction
RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
RE16 Fine sifting kit	16 mm	
RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

\* Shafts in closed position.

## OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder
24 Month Warranty	

## APPLICATION AREAS



Quarry



Mines



Pipelines



Inert material  
recycling



Excavations



Foundries



Maintaining landscape  
and agricultural areas