



# SORTING GRAPPLE

# MB-G500 S4



## SPECIFICATIONS

Recommended excavator	ton	5 - 8
Weight	ton	0,42
Capacity (claws closed)	m <sup>3</sup>	0,18
Rotation	Degree	360°
Oil pressure (rotation)	bar	160 - 200
Oil flow rate (rotation)	l/min	15 - 25
Maximum oil pressure (opening - closing)	bar	180 - 250
Maximum oil flow rate (opening - closing)	l/min	30 - 40
Size A	mm	1500
Size B	mm	980
Size C	mm	415
Size D	mm	1095
Size E	mm	855
Size F	mm	530
Size G	mm	555

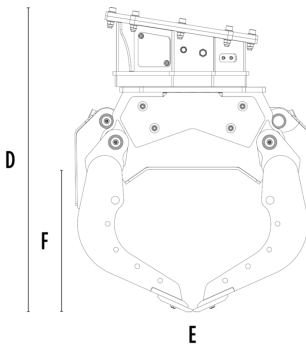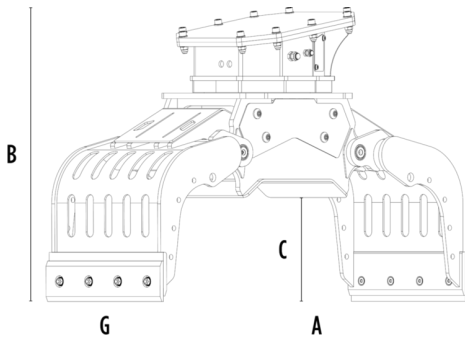

## OPTIONAL ACCESSORIES

Multi-purpose blade kit	Clam shell kit
Serrated side plate kit	Grip improvement kit
Rubber protection kit	Electrical kit (for 2 hose functionality) 12 V

## APPLICATION AREAS



Demolitions



Road works



Tunnels



Enclosed spaces



Pipelines



Urban construction site



Maintaining landscape and agricultural areas



Forest Maintenance

