



SORTING GRAPPLE

MB-G350 S4



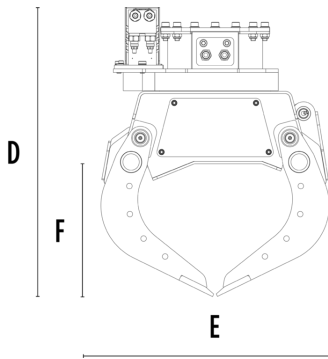

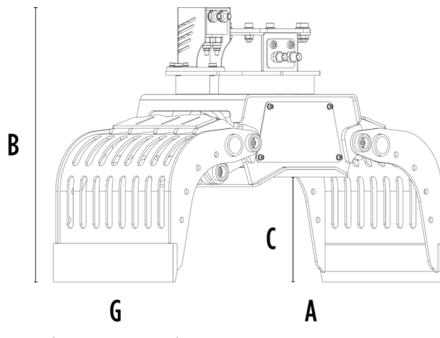





SPECIFICATIONS

| | | |
|---|----------------|-----------|
| Recommended excavator | ton | 1,3 - 2,6 |
| Weight | ton | 0,085 |
| Capacity (claws closed) | m ³ | 0,03 |
| Rotation | Degree | 360° |
| Oil pressure (rotation) | bar | 130 - 170 |
| Oil flow rate (rotation) | l/min | 5 - 10 |
| Maximum oil pressure (opening - closing) | bar | 180 - 220 |
| Maximum oil flow rate (opening - closing) | l/min | 15 - 20 |
| Size A | mm | 795 |
| Size B | mm | 570 |
| Size C | mm | 233 |
| Size D | mm | 615 |
| Size E | mm | 490 |
| Size F | mm | 283 |
| Size G | mm | 350 |

OPTIONAL ACCESSORIES

| | |
|--|-------------------------|
| Clam shell kit | Serrated side plate kit |
| Electrical kit (for 2 hose functionality) 12 V | 24 Month warranty |

APPLICATION AREAS

| | | | | |
|--|---|---|--|--|
|  Demolitions |  Road works |  Tunnels |  Enclosed spaces |  Pipelines |
|  Urban construction site |  Maintaining landscape and agricultural areas |  Forest Maintenance | | |

