



SHAFTS SCREENERS MB-HDS212



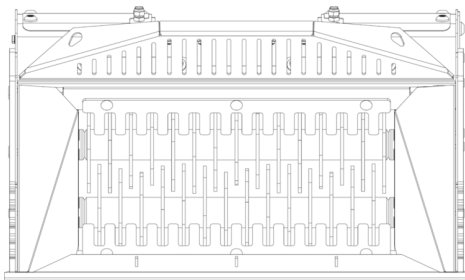


A

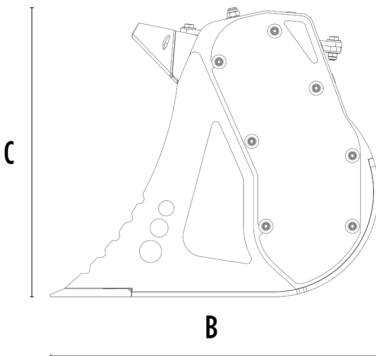

B



SPECIFICATIONS








	Recommended excavator	lb	11,020 - 22,050
	Recommended backhoe loader/loader*	lb	17,640 - 19,840**
	Recommended skid steer loader*	lb	6,610 - 8,820
	Weight	lb	1,058
	Load capacity	cy	0.2
	Pressure	PSI	2,901 - 3,626
	Oil flow rate***	gal/min	20 - 26
	Size A	in	48
	Size B	in	32
	Size C	in	28

* Please verify machine's Rated Operating Capacity

** Applicable only on the rear arm of the backhoe.

*** The minimum hydraulic flow rate value must be alongside the required operating pressure

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	0.30 in	Sifting damp/dry soil
 RQ20 Sifting kit	0.8 in	Soil Aeration
 RQ50 Sifting kit	2.0 in	Soil Aeration
 RM Mixer kit		Compost Aeration Charcoal reduction Glass reduction Drywall reduction
 RE8 Fine sifting kit	0.30 in	Sifting damp/dry soil
 RE16 Fine sifting kit	0.60 in	
 RC Compost kit	1.40 in	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material recycling



Excavations



Urban construction site



Foundries



Maintaining landscape and agricultural areas