



DRUM CUTTER MB-R900



A

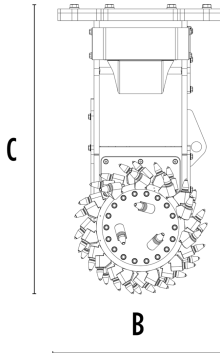

B

SPECIFICATIONS



| | | |
|--------------------------------|-------|-----------|
| Recommended excavator | ton | 19 - 35 |
| Weight | ton | 1,4 |
| Pressure | bar | 300 - 350 |
| Back pressure | bar | < 4 |
| Oil flow rate* | l/min | 250 - 350 |
| Cutting width | mm | 1130 |
| Pick force | N | 40000 |
| Speed/Min. (minimum - maximum) | rpm | 60 - 80 |
| Output torque | Nm | 13200 |
| Drum diameter | mm | 680 |
| Size A | mm | 1130 |
| Size B | mm | 680 |
| Size C | mm | 1375 |

* The minimum hydraulic flow rate value must be alongside the required operating pressure

OPTIONAL ACCESSORIES

Dust suppression kit Interchangeable drum kit (low-set / full-set)

Rock and asphalt pick kits

APPLICATION AREAS



Demolitions



Road works



Tunnels



Enclosed spaces



Pipelines



Excavations



Urban construction site



Maintaining landscape and agricultural areas



Underwater works



Profiling

