



# SHAFTS SCREENERS MB-HDS523

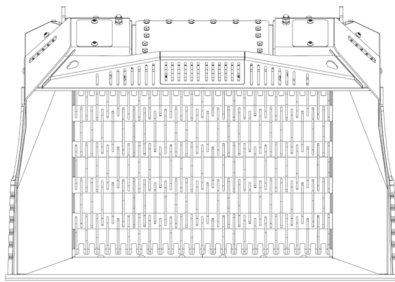

A



B

C










## SPECIFICATIONS



Recommended excavator	lb	66,140 - 99,210
Weight	lb	7,386
Load capacity	cy	2.62
Pressure	PSI	3,626 - 4,351
Oil flow rate*	gal/min	61 - 66
Size A	in	92
Size B	in	59
Size C	in	64

\* The minimum hydraulic flow rate value must be alongside the required operating pressure

## SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION	
 <b>RQ8 Sifting kit</b>  <b>RQ20 Sifting kit</b>  <b>RQ50 Sifting kit</b>	0.30 in	Sifting damp/dry soil Soil Aeration	
	0.8 in		
	2.0 in		
 <b>RM Mixer kit</b>		Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction	
	 <b>RE8 Fine sifting kit</b>  <b>RE16 Fine sifting kit</b>	0.30 in	Sifting damp/dry soil
		0.60 in	
	 <b>RC Compost kit</b>	1.40 in	Shredding foliage and small branches Composting

\* Shafts in closed position.

## OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder
24 Month warranty	

## APPLICATION AREAS



Quarry



Mines



Pipelines



Recycling aggregates



Excavations



Foundries



Maintaining landscape  
and agricultural areas