



# SCREENING BUCKET MB-S18 S4



A

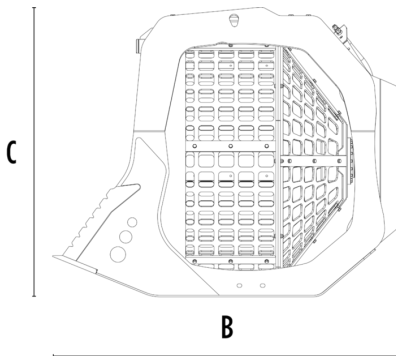

B

## SPECIFICATIONS



Recommended excavator	ton	20 - 35
Weight	ton	2
Load capacity	m <sup>3</sup>	2.4
Pressure	bar	200 - 250
Back pressure	bar	< 20
Oil flow rate*	l/min	120 - 140
Basket diameter	mm	1600
Basket depth	mm	1225
Size A	mm	1840
Size B	mm	2260
Size C	mm	1870

\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

## OPTIONAL ACCESSORIES

Dust suppression kit

Hour meter

Basket protection kit

## APPLICATION AREAS



Demolitions



Road works



Quarry



Mines



Tunnels



Enclosed spaces



Pipelines



Inert material recycling



Excavations



Urban construction sites



Foundries



Maintaining landscape and agricultural areas



Forest maintenance



Underwater works

