



# SHAFTS SCREENER MB-HDS307





A

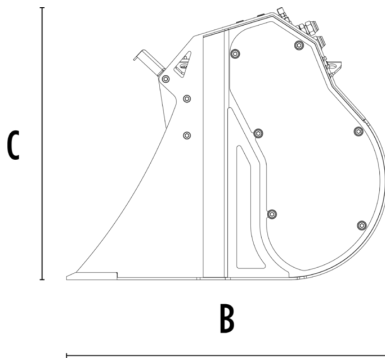

B

C

## SPECIFICATIONS




	Recommended excavator	ton	2,5 - 5
	Recommended backhoe loader/loader*	ton	4 - 6**
	Weight	ton	0,17
	Load capacity	m <sup>3</sup>	0.08
	Pressure	bar	200 - 220
	Oil flow rate***	l/min	25 - 35
	Size A	mm	760
	Size B	mm	700
	Size C	mm	595

\* Please verify machine's Rated Operating Capacity.

\*\* Installable on the backhoe loader boom only.

\*\*\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

## SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Sifting damp/dry soil
 RQ15 Sifting kit	15 mm	Soil Aeration
 RM Mixer kit		Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction

\* Shafts in closed position.

## OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ15 Sifting kit
RM Mixer kit	Shaft holder
24 Month Warranty	

## APPLICATION AREAS

