



SORTING GRAPPLE MB-G350 S4

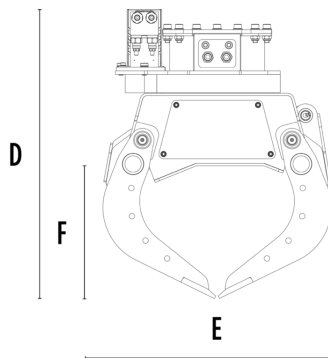

KARAKTERISTIK TEKNIKAL

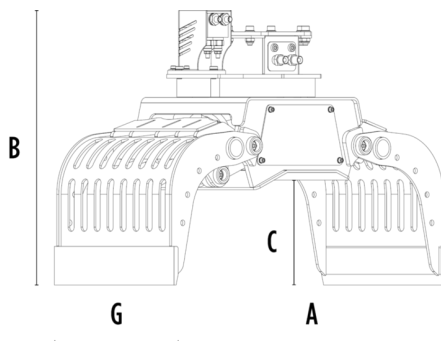

| | | |
|--|----------------|-----------|
| Ekskavator yang direkomendasikan | ton | 1,3 - 2,6 |
| Berat | ton | 0,085 |
| Kapasitas (grapple dalam keadaan tertutup) | m ³ | 0,03 |
| Rotasi | Derajat | 360° |
| Tekanan oli (rotasi) | bar | 130 - 170 |
| Arus oli mesin (rotasi) | l/min | 5 - 10 |
| Tekanan oli (opening/closing) | bar | 180 - 220 |
| Aliran oli hidrolik (opening/closing) | l/min | 15 - 20 |
| Dimensi A | mm | 795 |
| Dimensi B | mm | 570 |
| Dimensi C | mm | 233 |
| Dimensi D | mm | 615 |
| Dimensi E | mm | 490 |
| Dimensi F | mm | 283 |
| Dimensi G | mm | 350 |

AKSESORIS OPSIONAL

Clam shell kit

Kit side plat bergerigi

Kit Listrik (untuk fungsionalitas 2 pipa) 12 v

AREA PENERAPAN



Pembongkaran
Bangunan



Pekerjaan jalan



Pekerjaan terowongan



Ruang tertutup



Pekerjaan pipa



Proyek konstruksi di
perkotaan



Pemeliharaan lanskap
dan wilayah pertanian



Pemeliharaan hutan

