



SHAFTS SCREENERS MB-HDS312

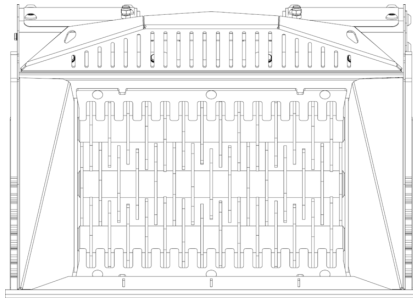

A

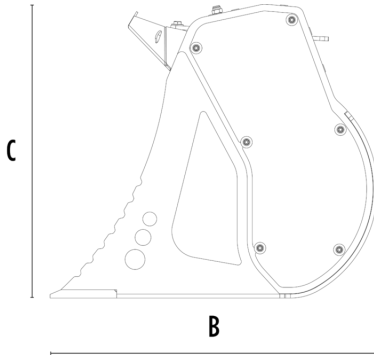

B

SPECIFICATIONS



Recommended excavator	ton	7 - 11
Weight	ton	0,72
Load capacity	m ³	0,35
Pressure	bar	200 - 250
Oil flow rate*	l/min	75 - 100
Size A	mm	1235
Size B	mm	985
Size C	mm	880

* The minimum hydraulic flow rate value must be alongside the required operating pressure

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
RQ8 Sifting kit	8 mm	Sifting damp/dry soil
RQ20 Sifting kit	20 mm	Soil Aeration
RQ50 Sifting kit	50 mm	Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction
RM Mixer kit		
RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
RE16 Fine sifting kit	16 mm	
RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder
24 Month warranty	

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Recycling aggregates



Excavations



Urban construction site



Foundries



Maintaining landscape and agricultural areas