




SHAFTS SCREENER MB-HDS220

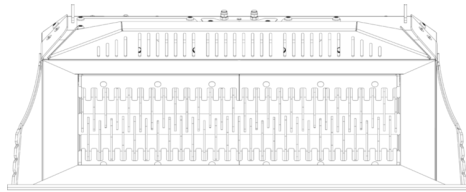

A

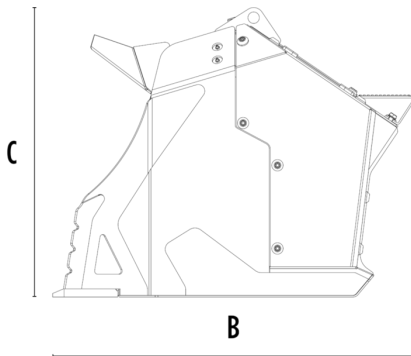

B

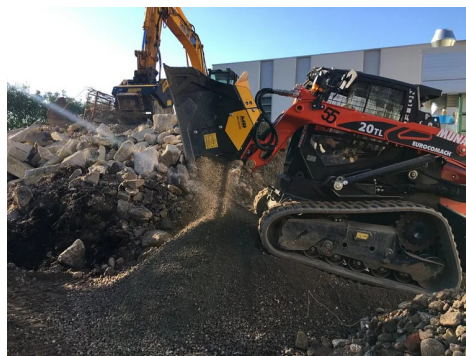

SPECIFICATIONS

Recommended backhoe loader/loader*	lb	15,430 - 24,250
Recommended skid steer loader*	lb	9,920 - 22,050
Weight	lb	2,205
Load capacity	cy	0.78
Pressure	PSI	3,336 - 4,061
Oil flow rate**	gal/min	24 - 70
Size A	in	87
Size B	in	42
Size C	in	35

* Please verify machine's Rated Operating Capacity.

** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
RQ8 Sifting kit	0.30 in	Sifting damp/dry soil
RQ20 Sifting kit	0.8 in	Soil Aeration
RM Mixer kit		Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction

* Shafts in closed position.

OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RM Mixer kit	Shaft holder
24 Month Warranty	

APPLICATION AREAS



Road works



Tunnels



Enclosed spaces



Pipelines



Inert material recycling



Excavations



Urban construction sites



Foundries



Maintaining landscape and agricultural areas