



SCREENING BUCKET MB-S10 S4



A

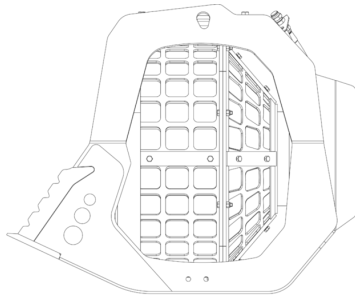

B

C

SPECIFICATIONS



| | | |
|----------------------------|---------|------------------|
| Recommended excavator | lb | 13,230 - 19,840 |
| Recommended backhoe loader | lb | 17,640 - 19,840* |
| Weight | lb | 904 |
| Load capacity | cy | 0.42 |
| Pressure | PSI | 1,885 - 2,176 |
| Back pressure | PSI | < 290 |
| Oil flow rate** | gal/min | 11 - 16 |
| Basket diameter | in | 31 |
| Basket depth | in | 22 |
| Size A | in | 37 |
| Size B | in | 48 |
| Size C | in | 40 |

* Applicable only on the rear arm of the backhoe.

** The minimum hydraulic flow rate value must be alongside the required operating pressure

OPTIONAL ACCESSORIES

Hour meter

Basket protection kit

24 Month warranty

APPLICATION AREAS



Demolitions



Road works



Tunnels



Enclosed spaces



Pipelines



Recycling aggregates



Excavations



Urban construction site



Maintaining landscape and agricultural areas



Forest Maintenance

