




SHAFTS SCREENERS MB-HDS323

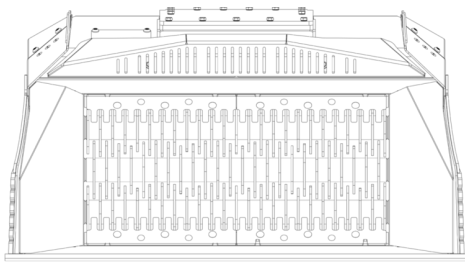

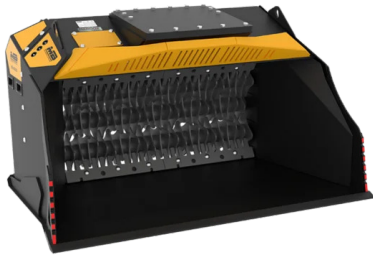

A

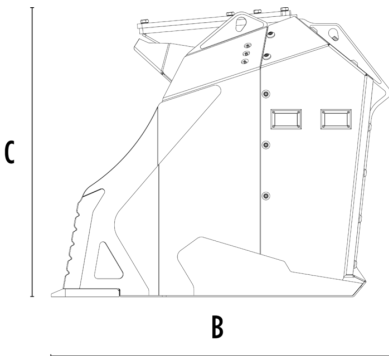

B



SPECIFICATIONS








	Recommended excavator	ton	22 - 35
	Recommended backhoe loader/loader*	ton	12 - 16
	Weight	ton	2,4
	Load capacity	m ³	1,65 - 2,00**
	Load capacity with coal capacity increase kit	m ³	2,00 - 2,40**
	Pressure	bar	250 - 300
	Oil flow rate***	l/min	120 - 160
	Size A	mm	2330
	Size B	mm	1500
	Size C	mm	1250
	Load capacity with coal capacity increase kit	cy	2.62 - 3.14**

* Please verify machine's Rated Operating Capacity

** The value of the load capacity varies according to the type of material being processed.

*** The minimum hydraulic flow rate value must be alongside the required operating pressure

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	8 mm	Sifting damp/dry soil
 RQ20 Sifting kit	20 mm	Soil Aeration
 RQ50 Sifting kit	50 mm	Soil Aeration
 RM Mixer kit		Compost Aeration Charcoal reduction Glass reduction Drywall reduction
 RE8 Fine sifting kit	8.5 mm	Sifting damp/dry soil
 RE16 Fine sifting kit	16 mm	Sifting damp/dry soil
 RC Compost kit	36.5 mm	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder

APPLICATION AREAS



aintaining landscape
and agricultural areas