




SHAFTS SCREENERS MB-HDS323

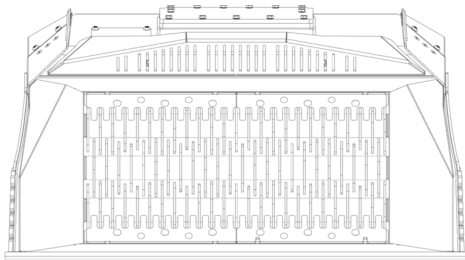

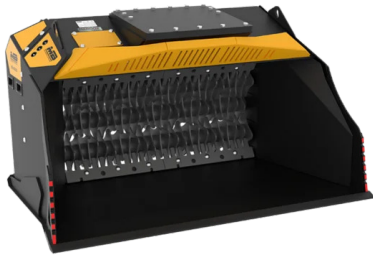

A

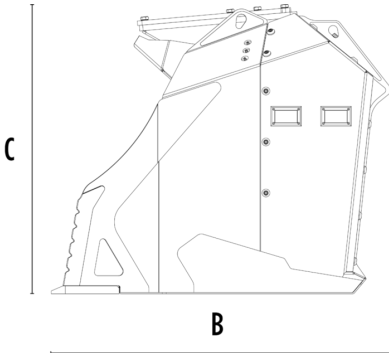

B



SPECIFICATIONS








	Recommended excavator	lb	48,500 - 77,160
	Recommended backhoe loader/loader*	lb	26,460 - 35,270
	Weight	lb	5,291
	Load capacity	cy	2.16 - 2.62**
	Load capacity with coal capacity increase kit	cy	2.62 - 3.14**
	Pressure	PSI	3,626 - 4,351
	Oil flow rate***	gal/min	32 - 42
	Size A	in	92
	Size B	in	59
	Size C	in	49

* Please verify machine's Rated Operating Capacity

** The value of the load capacity varies according to the type of material being processed.

*** The minimum hydraulic flow rate value must be alongside the required operating pressure

SHAFT KIT

KIT	ADJUSTMENT*	APPLICATION
 RQ8 Sifting kit	0.30 in	Sifting damp/dry soil
 RQ20 Sifting kit	0.8 in	Soil Aeration
 RQ50 Sifting kit	2.0 in	
 RM Mixer kit		Soil Aeration Compost Aeration Charcoal reduction Glass reduction Drywall reduction
 RE8 Fine sifting kit	0.30 in	
 RE16 Fine sifting kit	0.60 in	Sifting damp/dry soil
 RC Compost kit	1.40 in	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

RQ8 Sifting kit	RQ20 Sifting kit
RQ50 Sifting kit	RM Mixer kit
RE8 Fine sifting kit	RE16 Fine sifting kit
RC Compost kit	Shaft holder

APPLICATION AREAS

